CS Series Control Systems



CS Series Blower Control Systems

Lone Star knows Control

Efficient operation of any blower system is only as good as its control and integration to the process. Operating a very efficient blower inefficiently is very common when using 3rd party integrators. Lone Star offers a One Source Solution by offering not only local panels, but also including the process integration and a guaranteed preengineered and automated system.

Lone Star can field service or retrofit your existing blower and process control no matter the brand or technology.







sLOC™ Local Control

Automating your blower with a local control panel saves money through improved control functionality and protects your investment by monitoring critical inputs such as surge, vibration, or temperature. Local control panels can can also be provided with an integrated motor starter or variable frequency drive to save on installation and avoid integration issues. Systems are fully tested and warranted.

SMAC™ Master Control

There are two levels of master control that a sMACTM system can provide.

The first provides organizational control of the blowers through sequencing. Sequencing automates which blowers turn on and off, modulates them to provide the total desired output, balances run hours between units, and can automatically restart a system after a power outage or unplanned shutdown. Many systems have difficulty operating multiple blowers on a common header and a master control panel can solve this through active control.


The second level can provide complete automation of your blower process. Process control provides blower sequencing, combined with the automation of process valves and instrumentation, and results in maximized energy savings.

Lone Star is a UL508A listed electrical panel manufacturer and designs, manufacturers and programs panels in our factory in Houston.

sLOC™ Local Control

sLOCTM local control panels are designed to monitor, protect, and automate the operation of a blower. They also have a unique ability to calculate mass

flow more reliably and more accurately than by using a flow meter. By calculating enthalpy across the blower, and measuring speed and power, the controller can dynamically calculate a mass flow rate, even as temperature and pressure changes. This maximizes the blowers flow range and provides an accurate and consistent flow rate on demand.

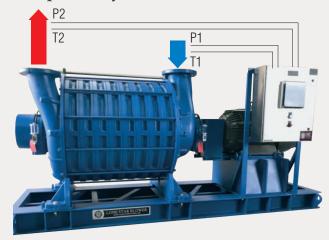

SMAC™ Sequencing Control

Efficiency Optimization: sMACTM sequencing can optimize your efficiency as blowers are not equally efficient throughout their operating range. A smart sequencer does not move all blowers up and down together, but will operate blowers in their most efficient "sweet spot" and allow only one blower to be a variable trim unit.



Auto Start/Stop Multiple Blowers

Balance Run Hours • Blend Multiple Technologies • Time Programmable

SMAC™ Process Control

Lone Star offers single point responsibility for the complete automation of


your process including all hardware and on-site integration. The sMACTM Process Controller can operate the blowers to a set point such as flow or pressure, but also to process control variables such as off-gas, ammonia or dissolved oxygen at many points of use.

sMAC[™] utilizes FOV – Fully Open Valve control uses flow set points to lower your header pressure to only what is required. Lower header pressure means lower power consumption!

However, we can also provide traditional MOV – Mostly Open Valve type control using pressure set points.

A ONE PSI REDUCTION SAVES 10% IN ENERGY!

PRESSURE
CONTROL
PRESSURE
FLOW
CONTROL
BASIN 1 BASIN 2 BASIN 3

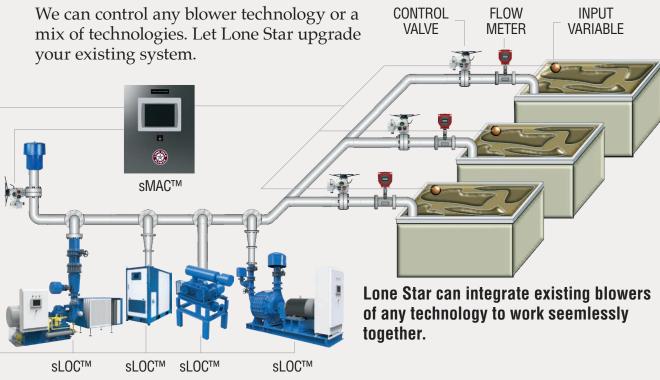


sLOC™ and **sMAC™** Controllers

Use an adjustable ramp control loop to operate with any control variable set point. This automatic adjustment keeps a process stable and saves energy.



Add Starlink™ to any control panel for remote monitoring!

SLOC™ Smart Local Control System	mart, ve	art, Very Smart!					
SLOC™ Smart Local Control System sMAC™ Smart Master Control System		Standard Controller Capabilities SLOC™-LS SLOC™-DT SLOC™-GL SMAC™					
SMAC - Smart Master Control System	S	_UU ''''-L	5	SLUC''''-DI	SLUC''''-GL	_	
Functions/Options	SLOC TM -LS-M (Monitoring)	sLOC TM -LS-V (Valve Control)	sLOC TM -LS-S (Speed Control)	SLOC TM -DT	SLOC TM -GL	SMAC TM (Sequencer, Process Controller)	
Blower Technology							
Multistage Turbo	S	S	S			S	
Gearless Turbo				S		S	
Geared Turbo					S	S	
Positive Displacement Retrofit to other brands	0	0	0		0	0	
Number of Units	1	1	1	1	1	2+	
Standard Controller							
Microprocessor Base Control	S	S	S	S	S	S	
Allen Bradly, Siemens or Custom PLC	0	0	0	0	0	0	
Touch Screen HMI	4"	7"	7"	4"	7"	10"	
SCADA Network Communication - Ethernet/IP Modem Connection	S	S	S	S	S	S	
Enclosure Types NEMA 1,3R,4,4X,7,12	0	0	0	0	0	0	
Electrical Ratings UL/ULC/CSA/CE Listed	s	S	S	S	S	S	
Languages Supported (ALL)	S	S	S	S	S	S	
Enclosure Types NEMA 1,3R,4,4X,7,12	0	0	0	0	0	0	
Blower Surge Protection	S	S	S	S	S		
Motor Overload Protection	S	S	S	S	S		
Flow Control Method				l	_		
Variable Inlet Guide Vane Variable Discharge Guide Vane					S S		
Inlet Valve Flow Control		s			3		
Blow Off Valve Control		0	0	S	S		
Isolation Valve		0	0	S	S		
Bleed Valve Control (Vacuum)		S	0				
Variable Frequency Drive Control			S	S	0		
Temperature Monitoring							
Blower Bearing Temperature Switch Blower Bearing Temperature Transmitter	S	S S	S S	S S	S S		
Blower Inlet and Outlet Temperature Transmitter	S	S	S	S	S		
Motor Bearing Temperature Transmitter	S	S	S	S	S		
Motor Winding Temperature Transmitter	S	S	S	S	S		
Oil Temperature					S		
Temperature Compensated Surge Protection	0	S	S	S	S		
Vibration							
Vibration Transmitter on Blower Bearings Vibration Transmitter on Motor Bearings	S	S S	S S	S	S S		
Vibration Transmitter on Gearbox	3	3	3		S		
Proximity Probes				S	S		
Pressure							
Inlet Filter Pressure Differential Switch	S	S	S	S	S		
Inlet Filter Pressure Differential Transmitter	S	S	S	S	S		
Inlet Vacuum		0					
Outlet Pressure Inlet Pressure		S	S	S	S		
Oil Pressure		S	S	S	S S		
Process Control Variables							
Dissolved Oxygen Control		S	S	S	S	S	
Ammonia Control		S	S	S	S	S	
Off Gas Control		S	S	S	S	S	
Vacuum Pressure Control		S	S	S	S	S	
Pressure Control Flow Control		S	S	S	S	S	
		S	S	S	S	S	
Process Control Multiple Units (all technologies/brands)						0	
Fully Open / Mostly Open Valve Control Logic						S	
Number of Control Variables		1	1	1	1	2+	
Motor Starter and Control				r and Control			
Full Voltage or Soft Starter	S	S		January	S		
Variable Frequency Drive			S	S	0		
Mounted and Wired on Common Blower Skid	0	0	0	S	S		

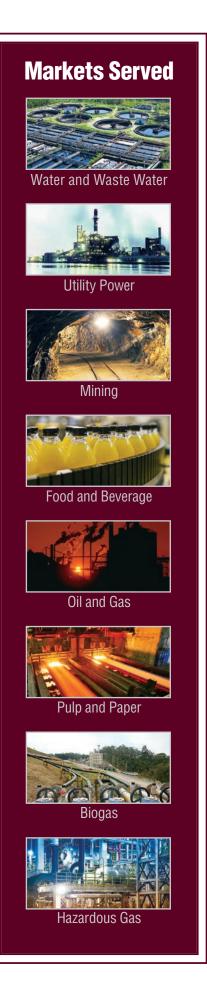

LONE STAR GLOBAL NETWORK

We have locations around the world to serve you



We manufacture the most advanced line of turbo blowers in the world.

Please visit our website at www.lonestarblower.com or call us today regarding your next application.





Lone Star Blower

8883 West Monroe Road Houston, Texas 77061 USA Tel: +1 832-532-3112

Fax: +1 832-532-3115

Email: info@lonestarblower.com